



# SEA HORSE SERVICES SDN.BHD

(Co.Reg.No.: 258211-A)

## AQUA FLOOR COAT

*Your Eco Practical Coating*

### PRODUCT CHARACTERISTICS

Aqua Floor Coat is a solvent-free epoxy coating that has excellent chemical and abrasion resistance, impact resistance and adhesion. It has outstanding self-leveling appearance, no crevices and bacteria can dwell low maintenance requirement. Suitable to use where durability is required with cleanable floor surface is required, good abrasion resistant to with standard light vehicular traffic, etc.




Before



After




Before

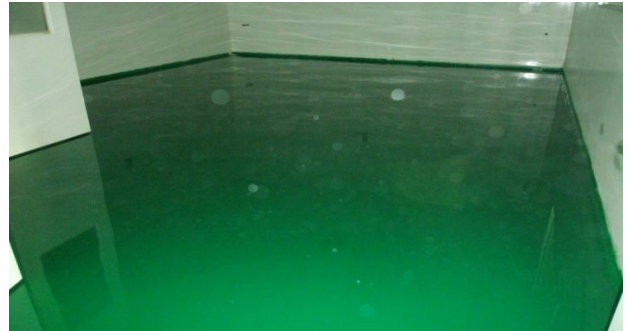

After



Before

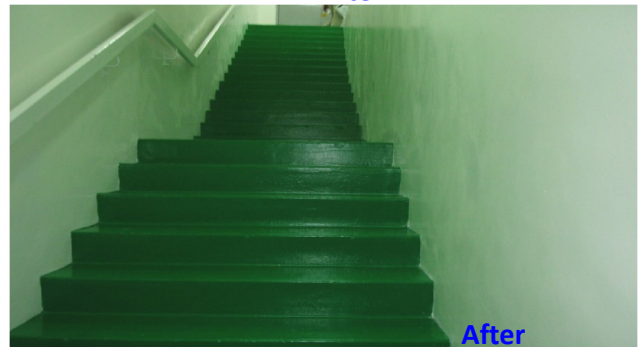

After



Before



After



# SEA HORSE SERVICES SDN.BHD

( Co.Reg.No : 258211- A )

## **AQUA FLOOR COAT** *Your Eco Practical Coating*

### RECOMMENDATION OF USE

Used for floors of chemical, office , hospital laboratory and etc.

### APPLICATION METHOD

Surface Preparation	-	All surfaces must be free of rust, grease. Oil, hospital, laboratory and etc.
Environmental Conditions		Air temperature: 10 ~ 35°C Relative humidity: up to 85%
Application Equipment	-	Roller, Rake, Trowel
Safety Precaution		Keep away from heat and open flame
		Avoid contact with skin and eye
		Use the mixed material within pot life ( 25°C, 50min)
		Do not mix with other paint
		Mix the material according to designated mixing ratio and use stirring it until uniformly blended

### PHYSICAL PROPERTIES

Finish	Gloss
Colour	Available on standard Floor colour others can be matched when required
Applied over	cement, concrete, mortar
Components	2
Volume solids	98± 2%
Recommended dry film thickness	2mm - 3mm
Coats	1 ~ 2
Theoretical coverage	1.3kg/2 <sup>2</sup> ( @D.F.T 3mm Allow for application losses and surface irregularities
Film hardness (shore d type)	75 (min)
Drying time at 25°	Dry through 1day to recoat 1 ~ 2days
Time before services	7 days
Mixing ratio ( by weight )	5:01
Pot life	50 ± 20min
Cleaner	Xyelen
Shelf life	6 month from manufacture date stored in door at 5 ~ 38° C